




We manage heat®

# Dual-Point General Purpose Heat-Trace Control TRACON MODEL GPT 230

DATA SHEET

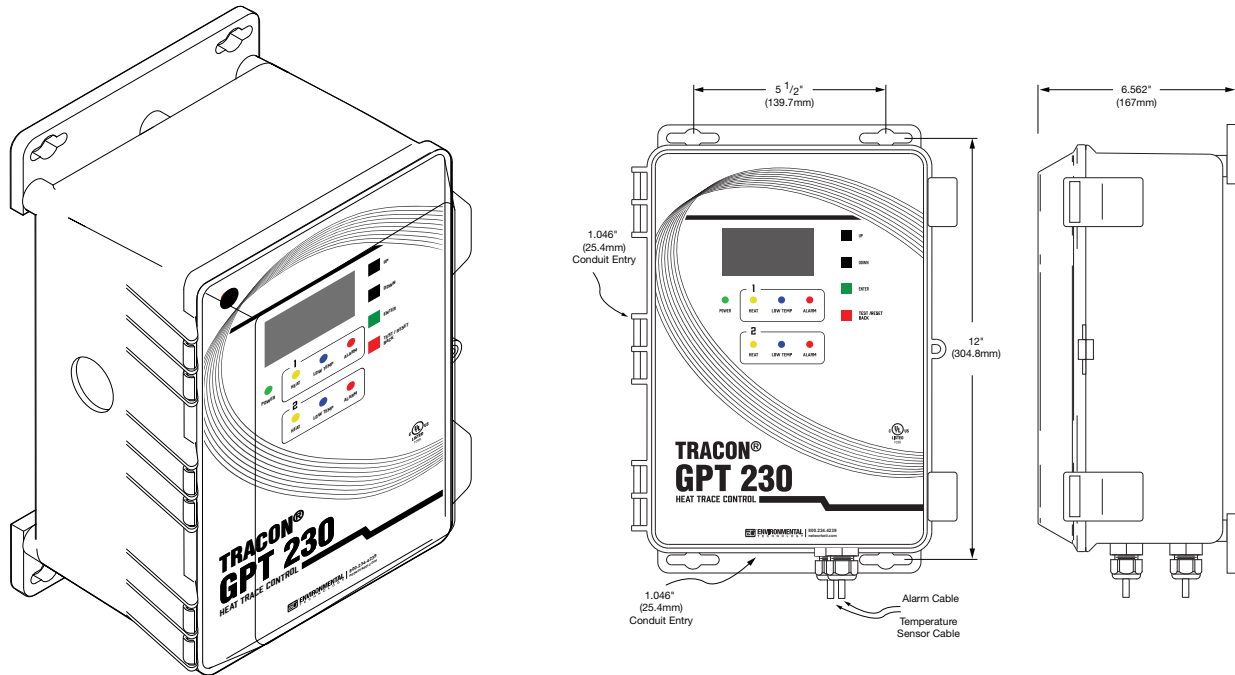

The GPT 230 Dual Channel Heat-Trace Control is a dual-point microprocessor-based heat-trace control thermostat. It is ideal for applications which require two independent heater-control Channels with Ground-Fault Equipment Protection (GFEP). Ideal uses include freeze protection, hot water temperature maintenance, grease line trace, tank heating, and other temperature monitoring and control applications.

The GPT 230 Heat-Trace Control operates from the heater's power source. A universal power supply allows the GPT 230 to operate from 100 V ac to 277 V ac. It can independently or jointly control two resistive loads up to 30 amps each.

### Adjustable Temperature Setpoint and Alarms

The temperature setpoints are adjustable from -99.9 °F to 999 °F (-73.3 °C to 537.7 °C) to a tenth degree resolution.

### Sensor Inputs

The GPT 230 comes with two 100K ohm Thermistor temperature sensors with 20 ft. jacketed cables. The included sensors have an operating range of -40 °F to 230 °F (-40 °C to 110 °C). The GPT 230 can also use 2-, 3-, or 4-wire RTD sensors for systems requiring high-temperature sensing. Two temperature sensor inputs are provided, and the channels can operate independently or from one sensor.

### Precision Monitoring and Control

The GPT 230 monitors temperature, load current, and ground leakage current. Alarms include high temperature, low temperature, high load current, low load current, ground fault, sensor fault, internal fault, and power fail. These alarms are easy to adjust and observe from the front panel. The GPT 230 can be set to energize or de-energize the heaters during a sensor fault.

### Ground-Fault Equipment Protection

The GPT 230 Heat-Trace Control includes integral GFEP for each channel. This eliminates the extra expenses associated with having to provide separate GFEP components in the circuit panel. The GPT 230 normally disconnects power immediately to the affected zone when ground fault current exceeds the set value. But if it is set to Fire Protect mode, for critical fire protection systems, then it will generate the alarm but power will be maintained to prevent freezing.

### Automatic GFEP Circuit Self-Test

To ensure continued safe operation, the GPT 230 performs a self-test of the GFEP circuits when power is first applied, along with a load ground fault test, and this repeats periodically thereafter at an adjustable interval.

For complete information describing its application, installation, and features, please contact Customer Service or check on the web at [networketi.com](http://networketi.com).

# Specifications

## General

Certifications UL 60730–1, UL 1053, CSA E60730–1:13

## Environmental

Area of use Nonhazardous locations  
 Operating temperature range –40 °F to 122 °F (–40 °C to 50 °C)

## Enclosure

Dimensions 9.0" (W) 12 4/5" x (H) x 5 9/10" (D)  
 229 mm (W) x 325 mm (H) x 150 mm (D)  
 Ingress protection NEMA 4X, IP66  
 Cover attachment Polycarbonate cover  
 Cable entries Two liquid-tight cable glands installed for sensor and alarm leads, cable diameter 0.08" to 0.24" (2 mm to 6 mm)  
 Two 1.046" holes to accommodate 3/4" conduit fittings for power wiring connections  
 Material Polycarbonate  
 Weight 5.8 lb. (2.63 kg)  
 Mounting Wall mount with flanges

## Wiring Terminal Ratings

Power Barrier Strip Terminals for Line, Neutral, and Ground; use 10 AWG wires rated for at least 194 °F (90 °C)  
 Sensors Terminal Block, rising cage clamp, 12–28 AWG leads  
 Alarm relay Terminal Block, rising cage clamp, 12–28 AWG leads

## Parameter Settings

Temperature setpoint heat ON Adjustable –99.9 °F to 999 °F (–73.3 °C to 537.7 °C)  
 Default 38 °F (3.33 °C)  
 Temperature setpoint heat OFF Adjustable –99.9 °F to 999 °F (–73.3 °C to 537.7 °C)  
 Default 40 °F (4.44 °C)  
 Low–temperature alarm threshold –99.9 °F to 999 °F (–73.3 °C to 537.7 °C)  
 Default 35 °F (–1.7 °C) Disabled  
 Low–temperature alarm delay 0 s to 3000 s  
 Default 300 s  
 High–temperature alarm threshold –99.9 °F to 999 °F (–73.3 °C to 537.7 °C)  
 Default 140 °F (60 °C) Disabled  
 High–temperature alarm delay 0 s to 3000 s  
 Default 300 s  
 Low–current alarm threshold 0.0 A to 10.0 A  
 Default 0.1 A Enabled  
 Low–current alarm delay 0 s to 300 s  
 Default 5 s Enabled  
 High–current alarm threshold 0.0 A to 55.0 A  
 Default 30.0 A Disabled  
 High–current alarm delay 0 s to 600 s  
 Default 300 s  
 Ground fault limit current 1.0 mA to 300.0 mA  
 Default 30 mA  
 Self–test interval 1 h to 250 h  
 Default 24 h Enabled  
 Temperature Unit °F or °C  
 Default ° F

## User Interfaces

Pushbuttons UP, DOWN, ENTER, TEST / RESET BACK  
 DIP switches RTD wiring configuration  
 Panel lockout

## Remote Interface

Alarm relay Isolated SPDT 1 AMP Class 2 contact per channel

## Indicators

Status indicator Power (Green)  
 Heater (Yellow)  
 Low Temperature (Blue)  
 Summary alarm (Red)  
 Display 2.7" OLED graphic 128x64  
 Summary alarm relay reporting Low temperature  
 High temperature  
 Low load current  
 High load current  
 High ground fault current  
 Stuck relay  
 Sensor fault  
 Internal fault

## Control Ratings

Temperature accuracy +/- 2 °F (1 °C)

## Temperature Sensors

Temperature inputs (Included) Two Thermistors: 100k ohms at 25 °C, range –40 °F to 230 °F (–40 °C to 110 °C), 20ft Lead (25076)  
 RTD Sensor: Platinum, Alpha = 0.00385, ITS–90, 100 ohms at 0 °C  
 Input supports 2–wire, 3–wire, or 4–wire connection  
 Sensor operates at 1 mA

## GFEP (Ground–Fault Equipment Protection)

Operation Continuously tests ground fault current whenever the load is on; also manually and periodically tests equipment ground fault current with each self–test.  
 Range Adjustable 1 mA to 300 mA, Default 30 mA  
 Automatic self–test Verifies GFEP functionality every 24 hr. and whenever the load is energized

## Power

Supply voltage 100 – 277 V ac 50/60 Hz  
 Controller power consumption 7 W maximum, 2.2 W idle  
 Load rating, each channel 30 A, 100 – 277 V ac resistive

*\*Specifications are at 77 °F (25 °C) and are subject to change without notice.*

# Ordering Information

Description	Part Number
Tracon MODEL GPT 230 Dual-Point General Purpose Heat–Trace Control	25171
Temperature Sensor	25076

## Limited Warranty

ETI's two year limited warranty covering defects in workmanship and materials applies. Contact Customer Service for complete warranty information.

## Disclaimer

Environmental Technology, Inc. makes no representations or warranties, either expressed or implied, with respect to the contents of this publication or the products that it describes, and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Environmental Technology, Inc. reserves the right to revise this publication, and to make changes and improvements to the products described in this publication, without the obligation of Environmental Technology, Inc. to notify any person or organization of such revisions, changes or improvements.

The ETI logo and We Manage Heat are registered trademarks of Environmental Technology, Inc. GPT is a trademark of Environmental Technology, Inc.  
 Copyright © 2017 Environmental Technology, Inc. All rights reserved.